

YAS30 YAS50 Series

CE RoHS




产品主要特性 General Characteristics

- 输入范围 165~265Vac
- 单路输出
- 1500Vac 隔离耐压
- Universal Input 165~265Vac
- Single Output Models
- I/O-isolation 1500Vac

产品选型表 Model Selection Guide

型号 Product Model	输入电压范围 (标称值) Input Voltage Range (Typical)	输出电压 Output Voltage (Vdc)	输出电流 Output Current (A)	典型效率 Efficiency (%)
YAS30-5-N	165~265Vac (220Vac)	5	6	80
YAS30-12-N		12	2.5	82
YAS30-15-N		15	2	82
YAS30-24-N		24	1.25	84
YAS30-48-N	200~375Vdc (310Vdc)	48	0.63	84
YAS50-5-N		5	10	79
YAS50-12-N		12	4	83
YAS50-15-N		15	3.3	83
YAS50-24-N		24	2	83
YAS50-48-N		48	1	85

封装尺寸和管脚定义图 Outline Diagram And Pin Out

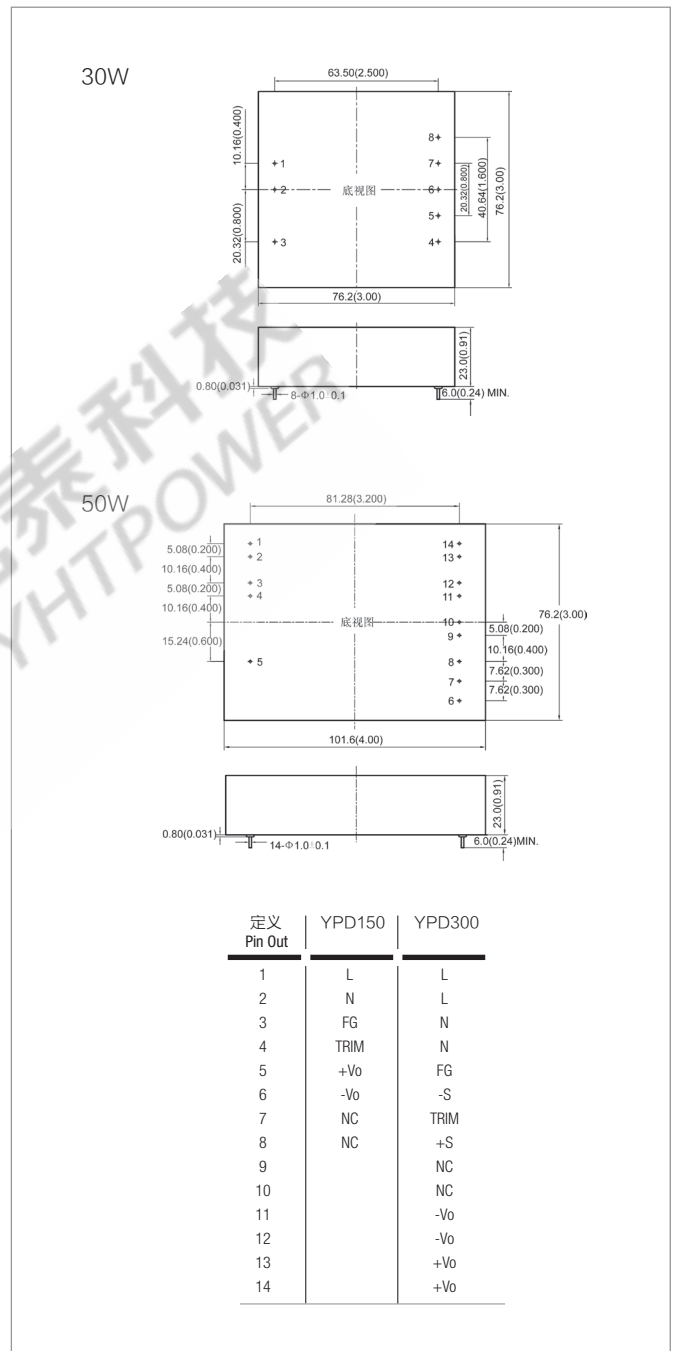

通用型 AC/DC 转换器

Universal AC/DC Converter