

TCS

Series


RoHS



产品主要特性 General Characteristics

- 标准 1U 机箱电源，输出金手指结构
- 全球通用输入范围 85Vac ~ 265Vac
- 3000Vac 隔离耐压
- 工作温度：-40~+70℃
- 输出短路保护自恢复
- 1U standard chassis power supply and the gold finger output terminals form
- Universal Input 85~265Vac
- I/O-isolation 3000Vac
- Operating Temperature: -40~+70℃
- Output Short-circuit Protection, Self recovery

封装尺寸和管脚定义图 Outline Diagram And Pin Out

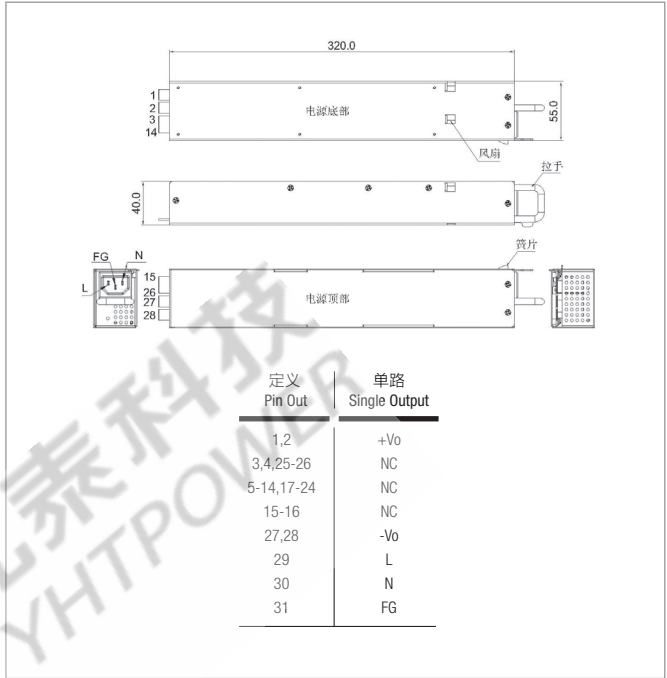

产品选型表 Model Selection Guide

型号 Product Model	输入电压范围 (标称值) Input Voltage Range (Typical)	输出电压 Output Voltage (Vdc)	输出电流 Output Current (A)	典型效率 Efficiency (%)
TCS100-12Y1	85~265Vac	12	8	85
TCS300-12Y1		12	24	87